

# Lappas

climbing.com

## LOWER - OFF ARROW Ti

200150 / 250150 / 300150

Lower-Off Arrow Ti - Titanium Gr2  
Σταθμός Ασφάλισης Lower-Off Arrow Ti - Τιτάνιο

technical sheet / τεχνικό φυλλάδιο

suitable for  
κατάλληλο για



\*Li (Installation length) = at least twice (2) the length of the Body of the rock anchor


**resistance requirements**  
statics tests  
απαιτήσεις στατικής φόρτισης

<b>A</b>	EN 959:2018	15kN
	UIAA 123	20kN
<b>B</b>	EN 959:2018	25kN
	UIAA 123	25kN

**effective strength / μέγιστη φόρτιση**

**A** 22,6kN   **B** 27,4kN   **C** 58kN

**C** orient the anchor towards the direction of the load

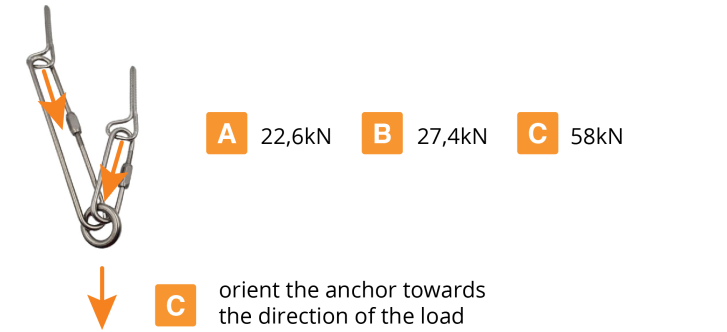

**installation / τοποθέτηση**

12mm, 14mm, 55mm, 10mm, 30°, Break-in, Test, Ok!

**APPROVED USE / ΟΡΘΗ ΧΡΗΣΗ**

**WARNING / ΠΡΟΣΟΧΗ**  
RISK OF ACCIDENT / ΚΙΝΔΥΝΟΣ ΑΤΥΧΗΜΑΤΟΣ

After the resin, do not touch the anchor and use it placed no earlier than 24 hours, even better if not least after 2/3 days (dependent on ambient temperature...). Still comply with the direction set by the factory of the resin used. The use of polyester type glue shall not be recommended.

rock / βράχος   rope / σκοινί